


DOOR HANDLE INSTALLATION MANUAL



Door handles are designed for installation on internal entrance and interior doors. They are made of Zamak alloy (alloy of zinc, aluminum, magnesium and copper).

Installation instruction:

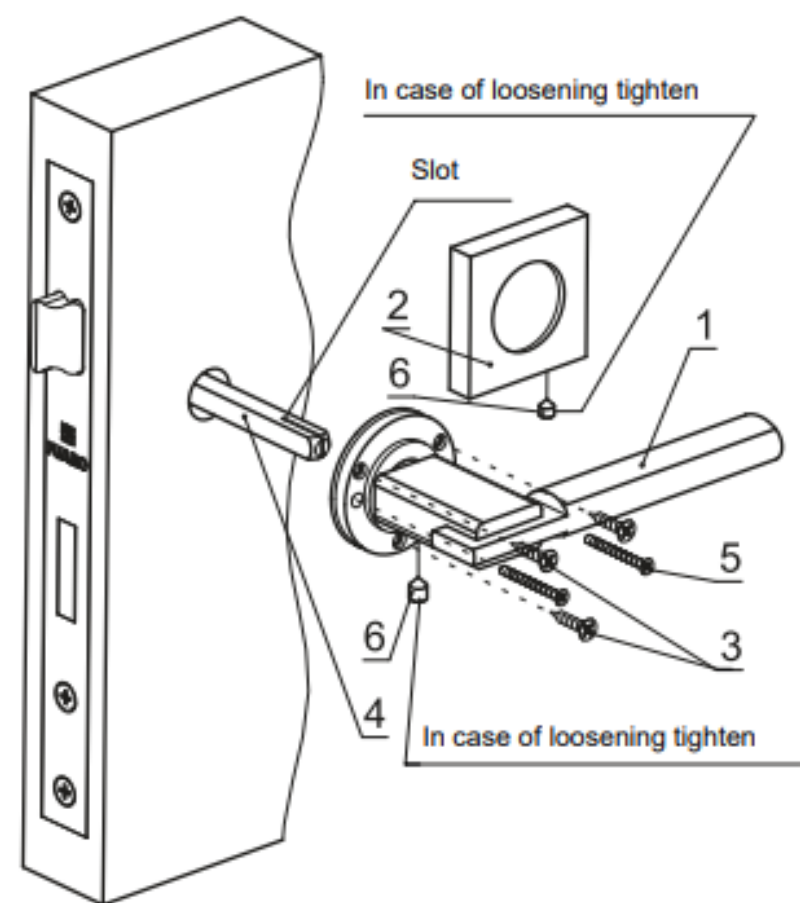

Place the connecting square (4) in the swivel socket of the lock. Make sure the square slot is positioned correctly.

Insert handles (1) on both sides of the door. With an awl or core mark the centers of the mounting holes, tighten the bases of the handles with screws (3). If there are through holes in the lock, connect the bases of the handles with the tie screws (5) for a stronger fixation on the door leaf. Install decorative onlays (2) and tighten the fixing screws (6) with hexagons.

Complete set:

1. Handles	1 pair
2. Decorative onlays	2 pcs.
3. Screws (L=16 mm)	6 pcs.
4. Square 8x105 mm	1 pcs.
5. Capscrews	2 pcs.
6. Fixing screws	4 pcs.
7. Hexagons	2 pcs.

Operating rules:

Treatment with abrasives and solvents is not allowed. Dirt and dust should be removed with a dry soft cloth.


Transportation and storage conditions:

Store in a dry place, transport in the manufacturer's packaging.

Warranty obligation:

The manufacturer guarantees trouble - free operation of the handle mechanism within 1 year from the date of sale*. In case of malfunctions within the warranty period, the product must be replaced at the place of purchase, provided that the complete set and the presence of a cash receipt.

* Despite the high quality of the coating, the manufacturer is not responsible for damage to the handle surface due to mechanical impact and non-compliance with the operating rules.

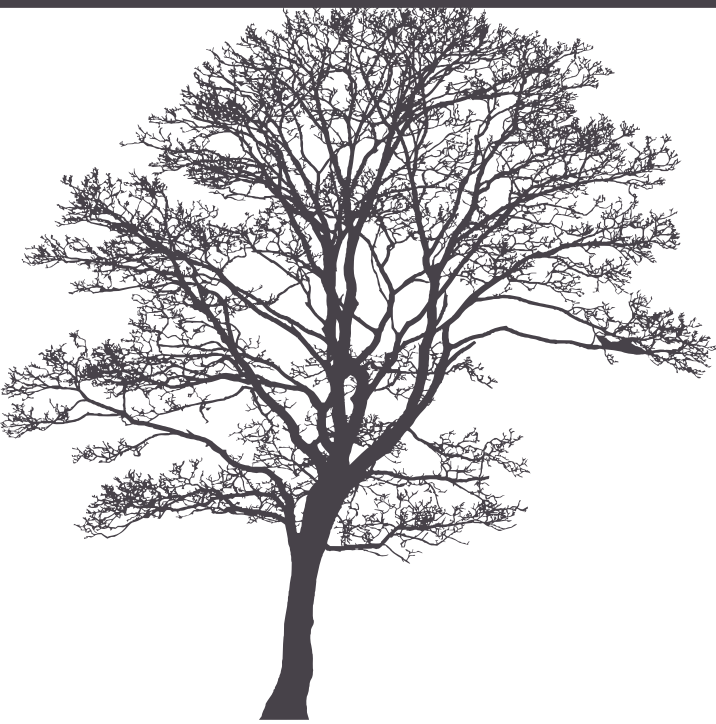

BELLDINNI INC

7025 Central Hwy, Pennsauken NJ 08109

CONTACTS

(908) 868-7877

WORKING HOURS

Call center:

Mon - Fri: 8:30am - 5:00pm.

Sat - Sun: Closed

Showroom:

484 Route 17, Paramus, NJ 07652

Sun - Mon: Closed

Tue - Fri: 9:30am - 6:30pm

Sat: 10am - 5pm

